

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 995 634 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
26.04.2000 Bulletin 2000/17

(51) Int Cl.7: B60R 1/06

(21) Application number: 99308125.6

(22) Date of filing: 14.10.1999

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: **Martin, Anthony**
Boğnor Regis, West Sussex PO21 3NW (GB)

(74) Representative: **Hollinghurst, Antony**
Britax International Services Ltd.,
Patent Department,
Factory 1,
Castle Trading Estate
Portchester, Hampshire PO16 9SU (GB)

(30) Priority: 22.10.1998 GB 9822995

(71) Applicant: **Britax Wingard Limited**
Warwick CV34 6DE (GB)


(54) Vehicle exterior mirror

(57) The mirror head of a vehicle exterior mirror has a hollow cylindrical bearing (28) which is journalled on a spigot (24).

The spigot (24) has radially outwardly projecting detents (52) on its outer end which engage with a shoulder (54) on the bearing (28) to retain the mirror head on the spigot-

ot (24). Slots (46) divide the outer end of the spigot (24) into lobes (38, 40) which are resiliently bendable inwardly to allow the detents (52) to move past the shoulder (54). After assembly, a cylindrical blocking element (56) is inserted into the spigot (24) to block inward bending movement of the lobes (38, 40).

Fig.3.

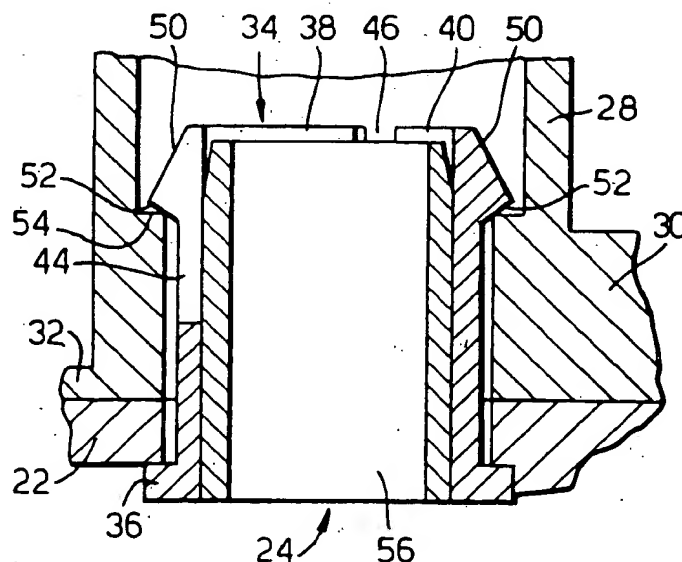

EP 0 995 634 A2

Description

[0001] This invention relates to an exterior mirror assembly for a motor vehicle comprising a mirror head in which a reflective member is mounted, a base including a support surface for the mirror head, and a cylindrical spigot having an outer end projecting from the support surface into the mirror head, wherein the mirror head includes a hollow bearing surface which is journaled on the spigot. Exterior mirror assemblies of this type are described in EP-A-0460893 and EP-A-0173113.

[0002] According to the invention, the spigot comprises a hollow cylindrical member having a plurality of circumferentially-spaced radially outwardly projecting detents on its outer end adapted to engage with a shoulder on the bearing to retain the mirror head on the spigot, said detents projecting radially outwardly beyond said cylindrical inner bearing surface and being resiliently deformable inwardly to permit insertion of said cylindrical member into said hollow bearing until said detents snap outwardly into co-operative relationship with said shoulder.

[0003] An embodiment of the invention will now be described, by way of example, with reference to the accompanying drawings, in which:

Figure 1 is an elevational view of a mirror assembly in accordance with the invention from the side which is viewed by a user, partially broken-away along the line 1-1 in Figure 2;

Figure 2 is a plan view of the mirror assembly shown in Figure 1, partially broken-away along the line 2-2 in Figure 1;

Figure 3 is a scrap sectional view to an enlarged scale of part of the mechanism, taken on the line 3-3 in Figure 2; and

Figure 4 is a scrap sectional view to an enlarged scale of part of the mechanism taken on the line 2-2 in Figure 1.

[0004] Figures 1 and 2 show an exterior mirror comprising a base 10 and a mirror case 12 containing a reflective member in the form of a silvered mirror glass 14. The base 10 has an abutment face 16 adapted to abut against a motor vehicle body and comprises a rigid base chassis 18 enclosed by a moulded plastics base cover 20. The chassis 18 includes a laterally projecting platform 22 containing a circular through hole for receiving a spigot 24, as will be described in more detail hereinafter.

[0005] The mirror head 12 has a rigid frame 26 comprising a hollow cylindrical portion 28 which is journaled on the spigot 24, an outwardly projecting portion 29 on which the mirror glass 14 is mounted in a conventional manner, and an inwardly projecting portion 30 supporting a generally vertically extending flange 32 which confronts the base chassis 18.

[0006] As can be seen from Figure 3, the spigot 24

comprises a hollow cylindrical body 34 having a flange 36 on its bottom end which engages with the lower surface of the platform 22. The upper end of the body 34 is divided into three arcuate lobes or fingers 38, 40 and 42 by vertical slots 44, 46 and 48 which extend about half way down the body 34. Each lobe 38, 40, 42 carries a respective radially outwardly projecting detent, each of which has an upper surface 50 inclined at about 25° to the cylinder axis of the spigot, and a lower surface 52 inclined at about 70° to the cylinder axis of the spigot 24.

[0007] When the mirror head 12 is to be assembled on the base 10, the holes for the spigot in the platform 22 and the cylindrical portion 28 of the frame 26 are aligned with one another. The spigot 24 is then inserted from the bottom, the inclined surfaces 50 engaging with the edges of the hole in the platform 22 so as to deflect the lobes 38, 40 and 42 inwardly. When the detents have passed a shoulder 54 on the inner wall of the cylindrical portion 28, the lobes move outwardly to their original position, the lower inclined surfaces 52 engaging with the edge of the shoulder 54 so as to hold the cylindrical portion 28 centrally with respect to the spigot 24. Next, a cylindrical insert 56, which is an interference fit within the body 34 of the spigot 24, is inserted from the bottom so as to prevent subsequent inward displacement of the lobes 38, 40 and 42, thereby preventing separation of the mirror head 12 from the base 10.

[0008] In order to maintain the mirror head 12 at a desired orientation relative to the base 10, the flange 32 has a projecting detent formation 60 (Figures 1, 2 and 4) which engages in a correspondingly shaped recess 62 in the confronting face of the base chassis 18. If sufficient force is applied to the outer end of the mirror case, the flange 32 bends relative to the inwardly projecting portion 30 so that the detent 60 can disengage from the recess 62, allowing the mirror head 12 to pivot about the spigot 24. The force required to cause such disengagement is determined by the height of the detent 60 above the inwardly projecting portion 30. If desired, the force required to bend the flange 32 can be reduced by forming vertically extending slots therein.

Claims

1. An exterior rear view mirror assembly for a vehicle, including a mirror head member (12) supported on a support base member (10) for swinging movement relative to said base member (10) about a hinge joint comprising a hollow bearing (28) on one of said members (10, 12) and a cylindrical member (34) projecting from the other of said members (10, 12) into said hollow bearing (28), said hollow bearing (28) having a cylindrical inner bearing surface and a shoulder (54) extending outwardly from said inner bearing surface, characterised in that said cylindrical member (34) has a plurality of circumferentially-spaced detents (50, 52) extending radially out-

wardly therefrom in co-operative relationship with said shoulder (54) to prevent separation of said mirror head member (12) from said base member (10), said detents (50, 52) projecting radially outwardly beyond said cylindrical inner bearing surface and being resiliently deformable inwardly to permit insertion of said cylindrical member (34) into said hollow bearing (28) until said detents (50, 52) snap outwardly into co-operative relationship with said shoulder (54).

wherein the head (12) includes a radially projecting portion (30) on which one of said projection and detent (60) is mounted.

2. A mirror assembly according to claim 2, wherein said cylindrical member (34) has a plurality of circumferentially-spaced resilient fingers (38, 40, 42) extending axially thereof and said detents (50, 52) are on said fingers (38, 40, 42), said shoulder (54).
3. A mirror assembly according to claim 2, wherein and said detents (50, 52) having co-operating cam surfaces thereon, and said fingers (38, 40, 42) being under bending stress to urge said base member (10) and said mirror head member (12) together axially of said cylindrical member (34).
4. A mirror assembly according to claim 1, 2 or 3, wherein said cylindrical member (34) is hollow and a blocking member (56) is received therein for blocking radially inward deformation of said detents (50, 52) to prevent movement of said detents (50, 52) out of co-operative relationship with said shoulder (54).
5. A mirror assembly according to any preceding claim, wherein the other of said members (10, 12) has a circular hole therethrough and said cylindrical member (34) extends through said circular hole has an outwardly extending flange (36) thereon on the opposite side of said circular hole from said hollow bearing (28).
6. A mirror assembly according to any preceding claim, wherein said hollow bearing (28) is on said mirror head member (12).
7. A mirror assembly according to claim 6, wherein said base member (10) has a support wall (22) on which said mirror head member (12) is supported and said cylindrical member (34) extends from said support wall (22) into said hollow bearing (28).
8. A mirror assembly according to any preceding claim, including a co-operating projection and detent (60) between said base member (10) and said mirror head member (12) for releasably holding said mirror head member (12) against rotation relative to said base member (10).
9. An exterior mirror assembly according claim 8,

10. An exterior mirror assembly according to claim 9, wherein the radially projecting portion (30) is formed integrally with the hollow cylindrical bearing (28).

Fig.1.

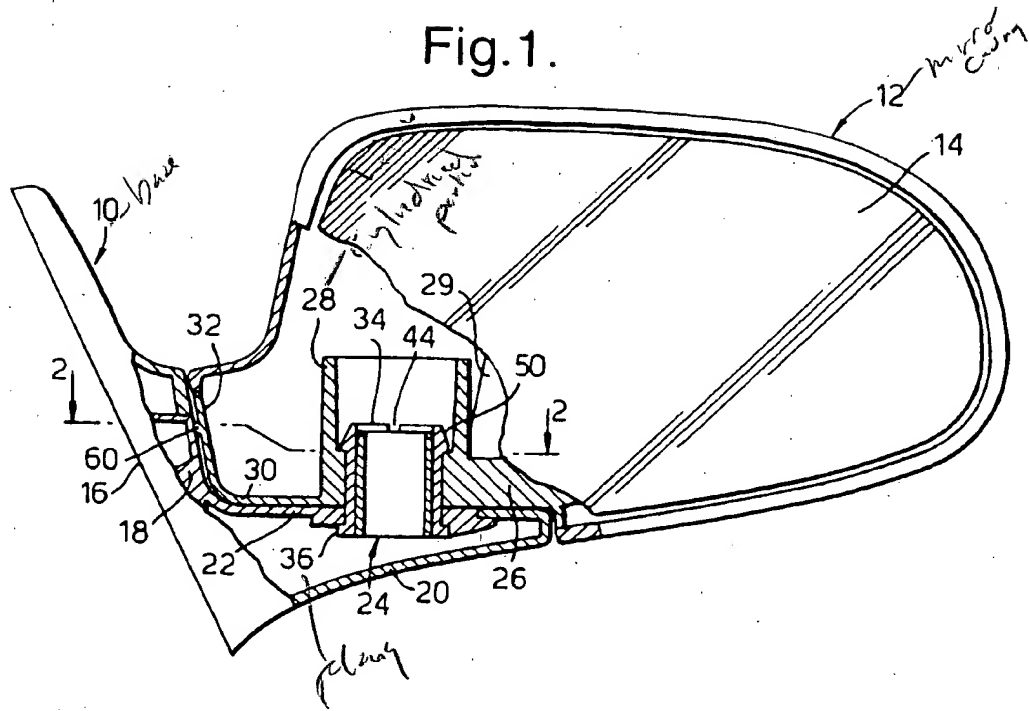


Fig.2.

